


FM FRONT-END

The TA7358AP is designed for a FM front-end application, which is suitable to a portable radio or a radio cassette.

Comparing with conventional types, supply voltage dependence, overload characteristics and spurious radiation characteristics are improved.


FEATURES

- Wide supply voltage range : $V_{CC} = 1.6 \sim 6.0V$
- Excellent supply voltage dependence of local oscillator : Oscillation stop $V_{CC} = 0.9V$ (Typ.)
- Improved inter-modulation characteristics by double balanced type mixer circuit.
- Low spurious radiation.
- Built-in clamping diode for the local oscillator output.

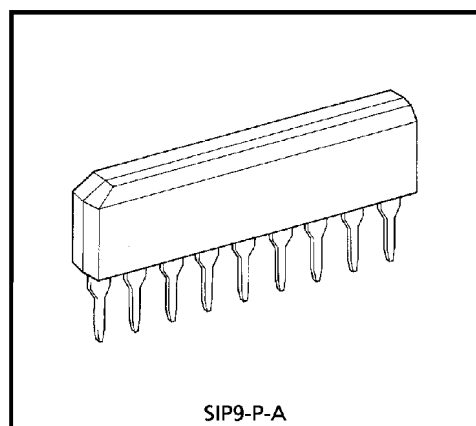

Weight : 0.92g (Typ.)

BLOCK DIAGRAM

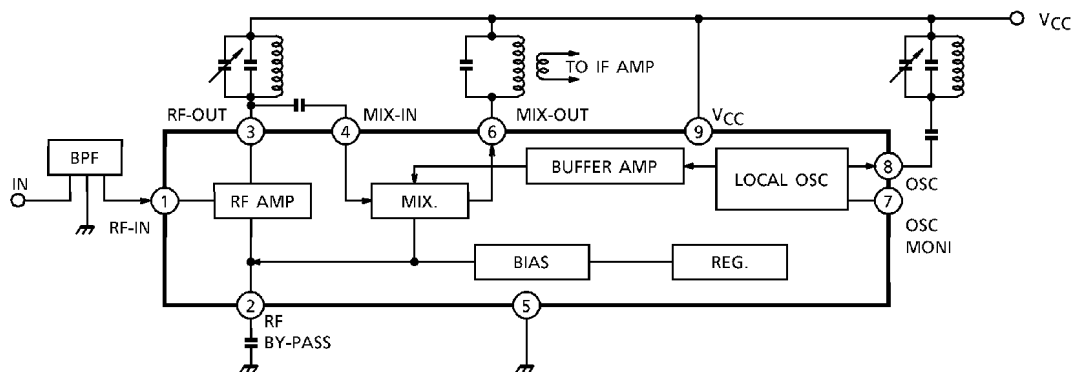

© The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.

© These TOSHIBA products are intended for use in general commercial applications (office equipment, communication equipment, measuring equipment, domestic appliances, etc.). please make sure that you consult with us before you use these TOSHIBA products in equipment which requires extraordinarily high quality and/or reliability, and in equipment which may involve life threatening or critical application, including but not limited to such uses as atomic energy control, airplane or spaceship instrumentation, traffic signals, medical instrumentation, combustion control, all types of safety devices, etc. TOSHIBA cannot accept and hereby disclaims liability for any damage which may occur in case the TOSHIBA products are used in such equipment or applications without prior consultation with TOSHIBA.

EXPLANATION OF TERMINALS (Terminal voltage is DC voltage at $T_a = 25^\circ\text{C}$, $V_{CC} = 5\text{V}$, and no signal)

PIN No.	SYMBOL	INTERNAL	TERMINAL VOLTAGE (V)
1	FM-RF IN		0.8
2	BY PASS		1.5
3	FM-RF OUT		5.0
4	MIX IN		1.5
5	GND	—	0
6	MIX OUT	cf. pin ④	5.0
7	OSC MONITOR		4.3
8	OSC		5.0
9	V_{CC}	—	5.0

MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)


CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V_{CC}	8	V
Power Dissipation	P_D (Note)	500	mW
Operating Temperature	T_{opr}	-25~75	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55~150	$^\circ\text{C}$

(Note) Derated above 25°C in the proportion of $4\text{mW}/^\circ\text{C}$.


ELECTRICAL CHARACTERISTICS ($V_{CC} = 3\text{V}$, $f = 83\text{MHz}$, $f_m = 1\text{kHz}$, $\Delta f = \pm 22.5\text{kHz}$, $T_a = 25^\circ\text{C}$)

CHARACTERISTIC		SYMBOL	TEST CIR- CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Current		I_{CC}	2	$V_{in} = 0$	—	5.2	8.0	mA
-3dB Limiting Sensitivity		$V_{in}(\text{lim})$	2	—	—	3.0	7.0	$\text{dB}\mu\text{V}$ EMF
Quiescent Sensitivity		Q_S	2	—	—	11.0	—	$\text{dB}\mu\text{V}$ EMF
Conversion Gain		G_C	—	—	—	31	—	dB
Local OSC Voltage		V_{OSC}	1	$f_{OSC} = 60\text{MHz}$	90	165	220	mV_{rms}
Pin ① Impedance	Parallel Input Resistance	r_{ip1}	3	$f = 83\text{MHz}$	—	57	—	Ω
Pin ③ Impedance	Parallel Output Resistance	r_{op3}	3		—	25	—	$\text{k}\Omega$
	Parallel Output Capacitance	C_{op3}			—	2.0	—	pF
Pin ④ Impedance	Parallel Input Resistance	r_{ip4}	3		—	2.7	—	$\text{k}\Omega$
	Parallel Input Capacitance	C_{ip4}			—	3.3	—	pF
Pin ⑥ Impedance	Parallel Output Resistance	r_{op6}	3		$f = 10.7\text{MHz}$	—	100	—
	Parallel Output Capacitance	C_{op6}		—		4.8	—	pF
Local OSC Stop Voltage		V_{stop}	1	—	—	0.9	1.3	V

TEST CIRCUIT 1

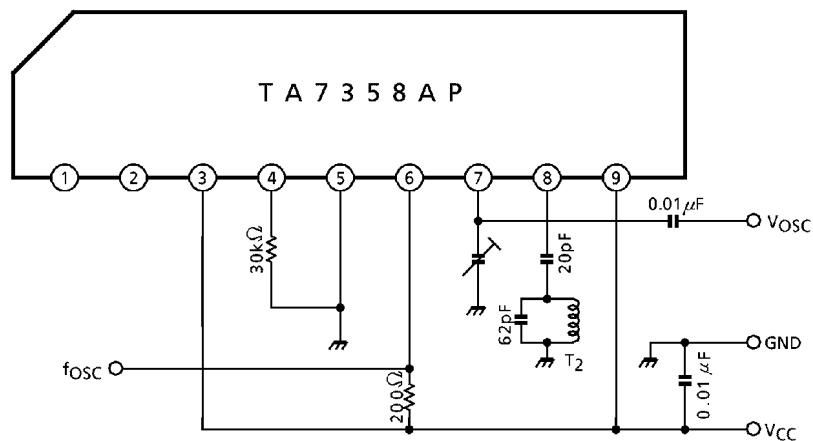


TEST CIRCUIT 2

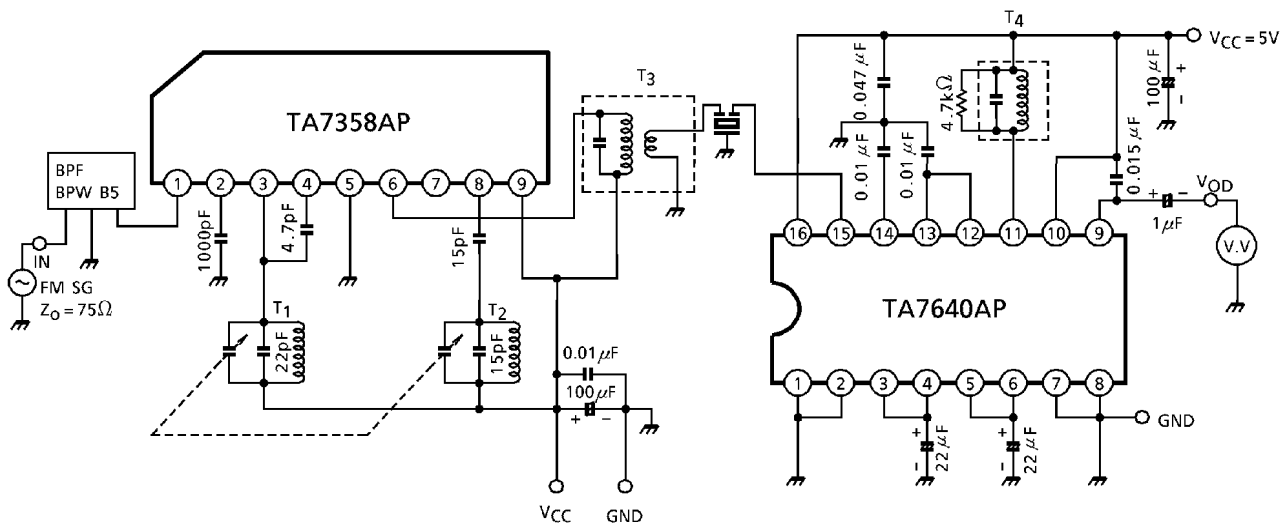


TEST CIRCUIT 3

Input output impedance


(1) r_{ip1} , C_{ip1}

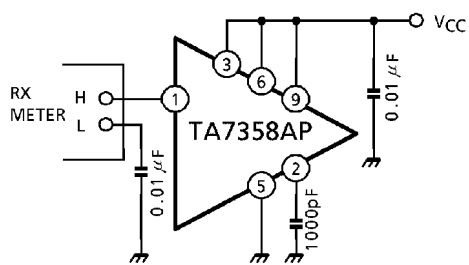


(2) r_{op3} , C_{op3}

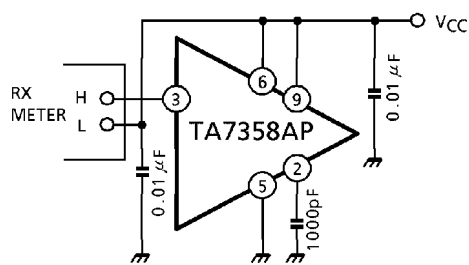





(3) r_{ip4} , C_{ip4}

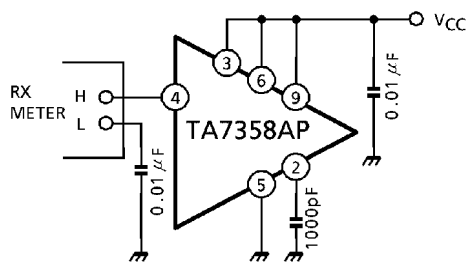

(4) r_{op6} , C_{op6}

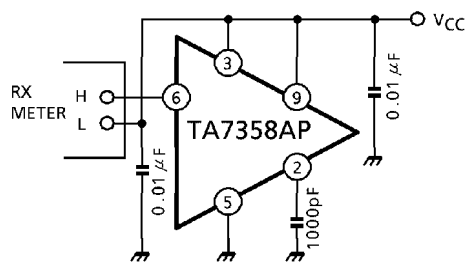

TEST CIRCUIT COIL DATA (Japan band for 76.0MHz to 108.0MHz)




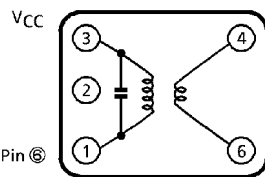

COIL	f_o	Q_o	TURNS	CAPACITANCE	
T ₁ RF Coil	100MHz	100	0.5mm ϕ 2 $\frac{1}{4}$ T Center Tap (Japan Band)	15pF (External)	 FERRITE CORE
T ₂ OSC Coil	100MHz	100	0.5mm ϕ 2 $\frac{1}{2}$ T (Japan Band)	15pF (External)	 FERRITE CORE
T ₃ IFT Coil	10.7MHz	115	①-③ 12T ④-⑥ 1T Wire 0.12mm ϕ UEW SUMIDA ELECTRIC Co., LTD. 5764 or equivalent	75pF	 VCC Pin ⑥ (BOTTOM VIEW)
T ₄ Quad Coil	10.7MHz	150	④-⑥ 14T Wire 0.12mm ϕ UEW SUMIDA ELECTRIC Co., LTD. 44M-933A or equivalent	47pF	 (BOTTOM VIEW)

Band Pass Filter (BPF)

SOSHIN ELECTRIC Co., LTD. BPWB5


Tuning Capacitor

ALPS ELECTRIC Co., LTD. CB41EL933

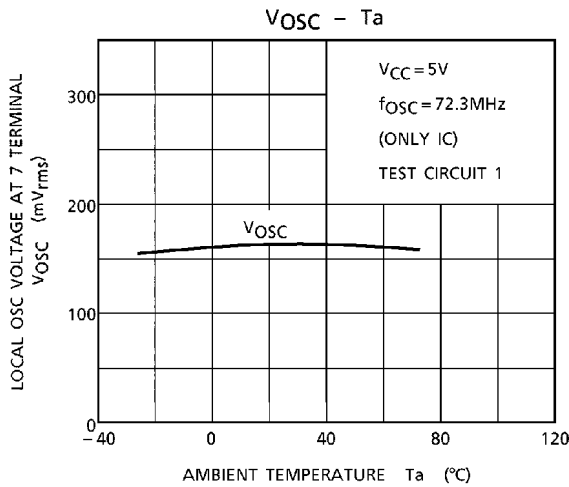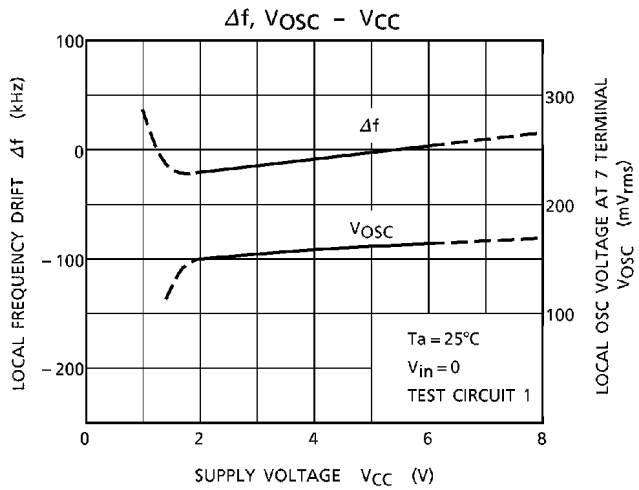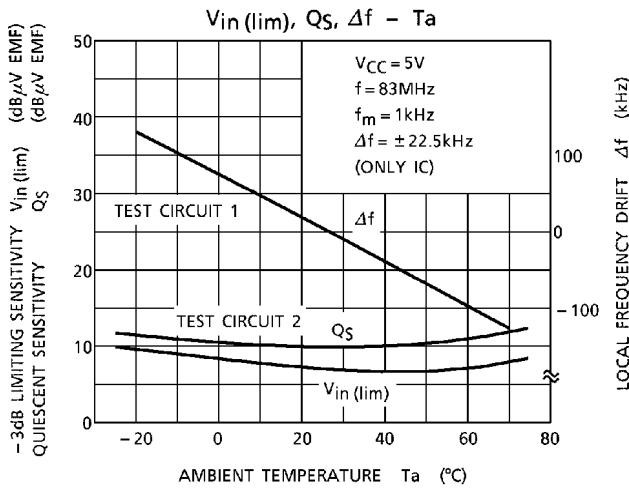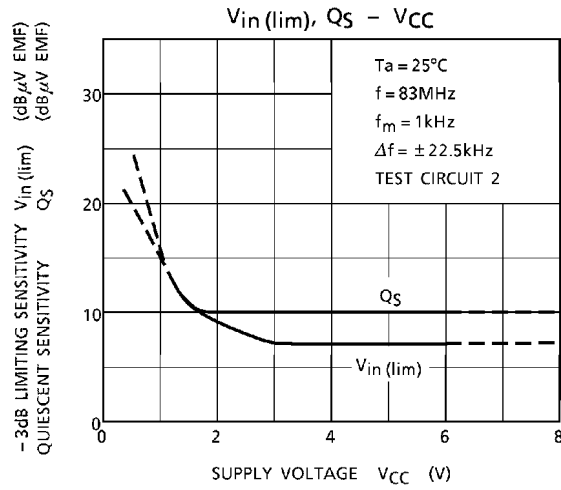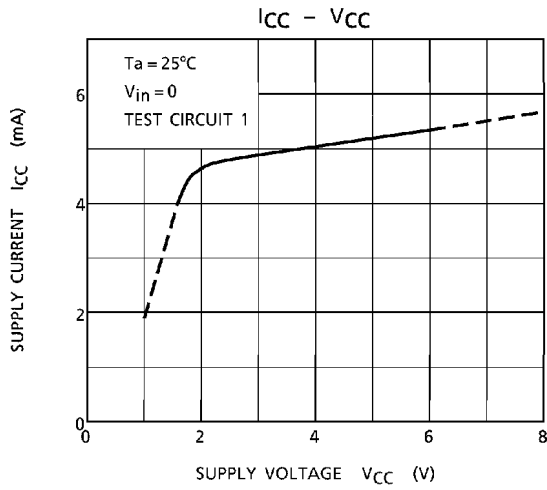

OUTLINE DRAWING
 SIP9-P-A

Unit : mm

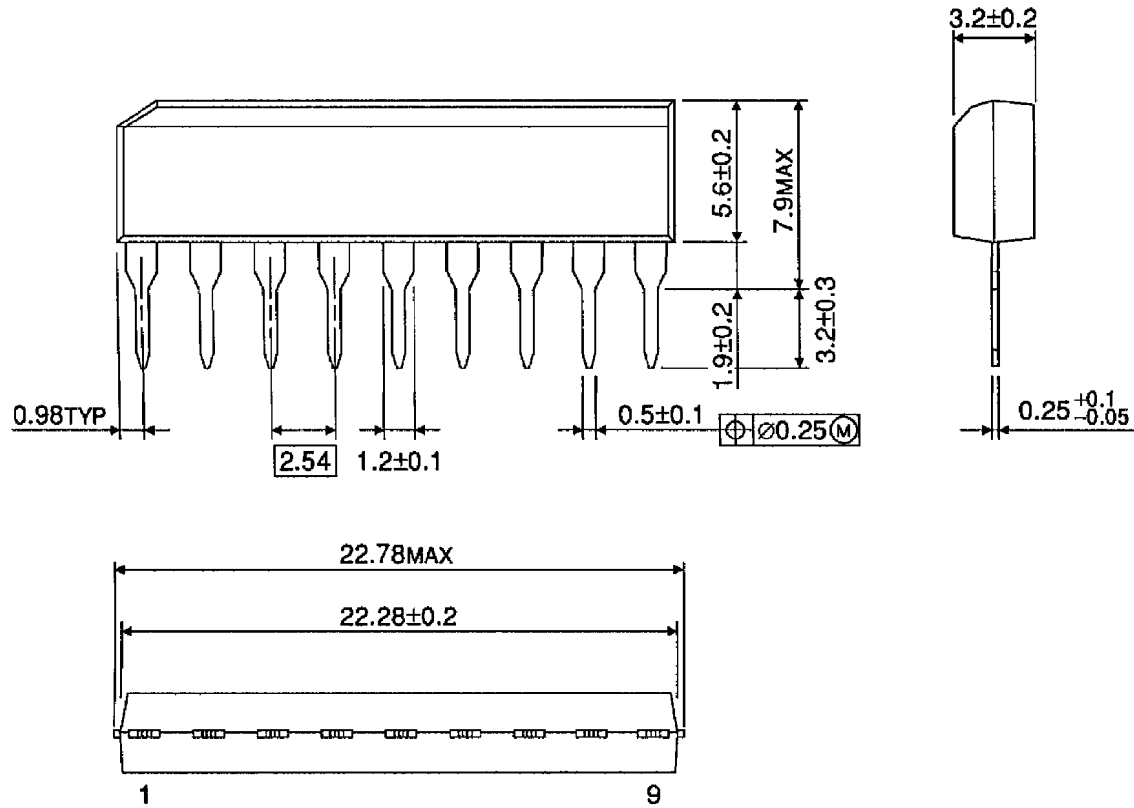

Weight : 0.92g (Typ.)